

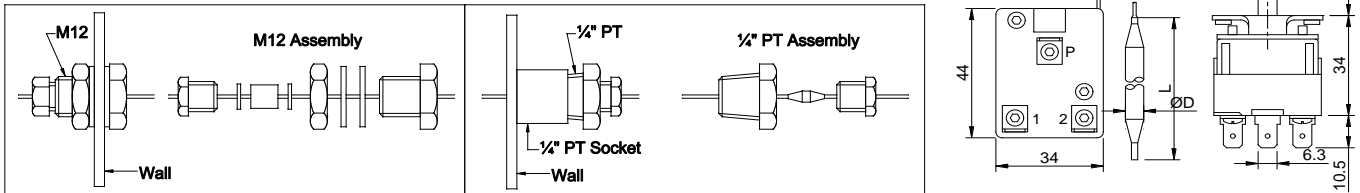


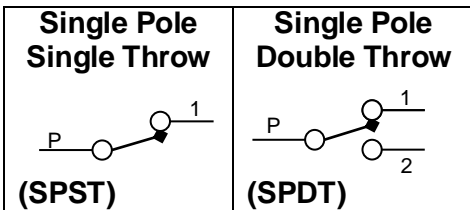

Made in Italy

TU-V, Electric Thermostat Switch, Rating: 250V, 20A

Thermostat is a component for regulating the temperature of a system so that the system's temperature is maintained near a desired set-point temperature. Thermostat does this by switching heating or cooling device on or off to maintain the correct temperature. Thermostat can be used for controlling of kitchen equipment such as oven, griddle, bain marie, chiller, freezer and building heating system, air conditioners and HVAC systems.

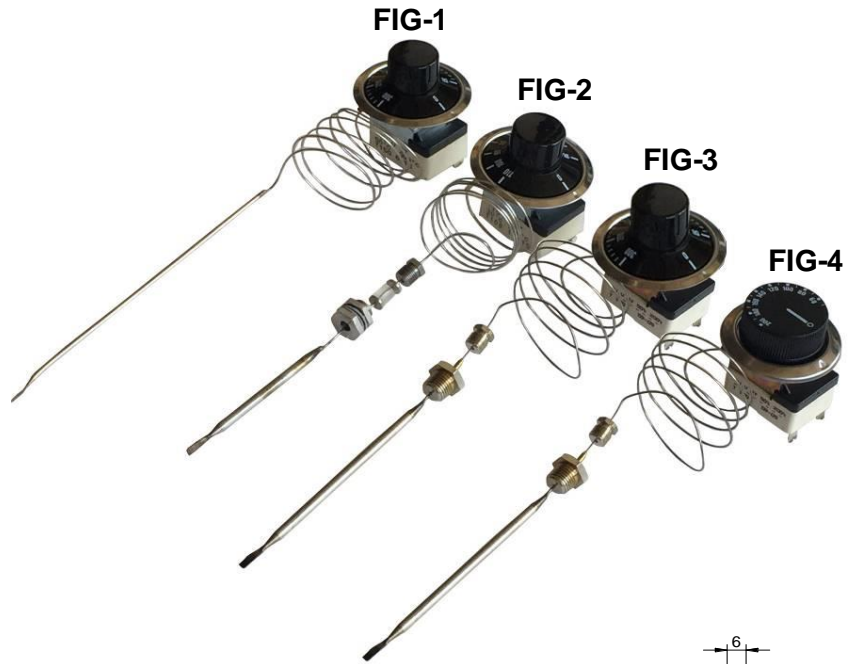

Model	Temperature Range & Knob Ø	Picture	Sensor Size		Capillary Length	Stuffing Box
			Ø(mm)	(L)mm		
TU-V, SPST 30-110	30°C ~ 110°C (Ø50mm)	FIG-2	5	90	900mm	M12
TU-V, SPST 50-300	50°C ~ 300°C (Ø50mm)	FIG-1	3	175	900mm	NIL
TU-V, SPST 30-90	30°C ~ 90°C (Ø50mm)	FIG-2	5	118	900mm	M12
TU-F, SPST 30-80	30°C ~ 80°C (Ø40mm)	FIG-4	6.5CU	105	900mm CU	NIL

TU-V, SPDT 4-40	4°C ~ 40°C (Ø40mm)	FIG-4	5	180	900mm	NIL
TU-V, SPDT 30-90	30°C ~ 90°C (Ø50mm)	FIG-2	5	118	900mm	M12
TU-V, SPDT 30-90	30°C ~ 90°C (Ø50mm)	FIG-3	5	118	900mm	1/4" BSPT
TU-V, SPDT 30-110	30°C ~ 110°C (Ø50mm)	FIG-2	5	90	900mm	M12
TU-V, SPDT 30-110	30°C ~ 110°C (Ø50mm)	FIG-3	5	90	900mm	1/4" BSPT
TU-V, SPDT 50-220	50°C ~ 220°C (Ø50mm)	FIG-1	5	110	900mm	NIL
TU-V, SPDT 50-300	50°C ~ 300°C (Ø50mm)	FIG-1	3	175	900mm	NIL
TU-V, SPDT 50-300	50°C ~ 300°C (Ø50mm)	FIG-1	5	80	900mm	NIL
TU-V, SPDT 50-300	50°C ~ 300°C (Ø50mm)	FIG-3	5	80	900mm	1/4" BSPT

TU-V, SPDT 50-200	50°C ~ 200°C (Ø40mm)	FIG-4	5	120	900mm	1/4" BSPT
TU-V, SPDT 60-350	60°C ~ 350°C (Ø40mm)	FIG-4	3	150	900mm	NIL
TU-V, SPDT 60-400	60°C ~ 400°C (Ø40mm)	FIG-4	3	150	900mm	NIL

Standard Stuffing Box - M12 are Supplied with some Model as above. Pipe Thread Fitting 1/4" & 3/8" are possible to add on. Please Consult Sales for further Information.